




SERIES IC



Automatic monobloc rotary bottling machine for filling and capping bottles, suitable for corrosive and non-corrosive liquids.

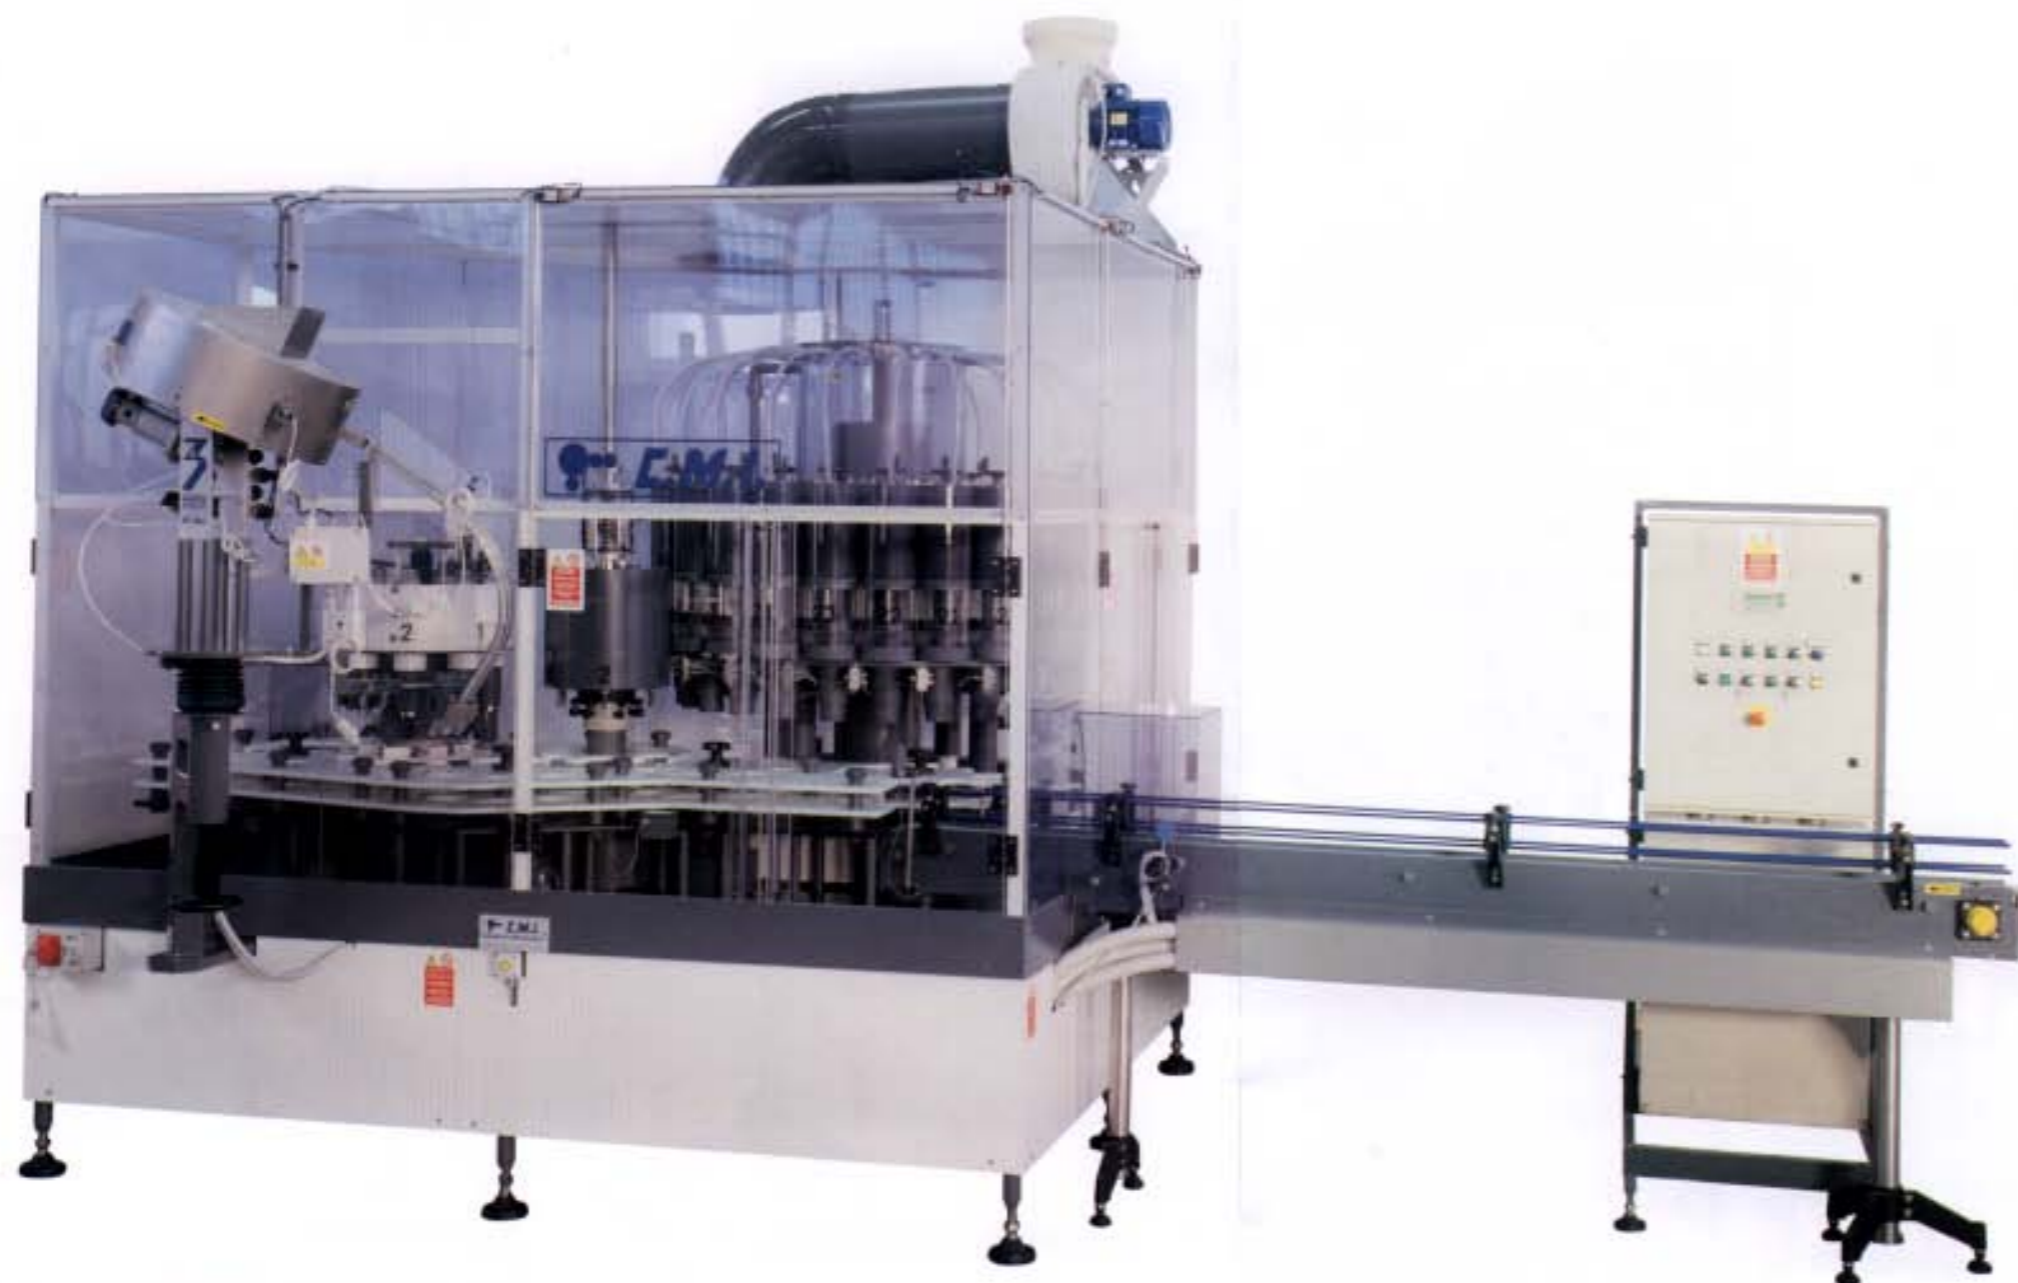

Technical Features

- Bottle infeed by conveyor belt
- Incoming bottle check device
- Gravity volumetric filling
- Pneumatic valves with no-drop system, Viton seals
- Bottle/liquid check device
- Continuous adjustment variable speed drive
- Cap feed rotary selector with automatic cap pick and placing on the bottle
- Capping by screwing heads with speed adjustment and mechanic clutch, or by pressing heads.
- Bottle outfeed by conveyor belt
- Outgoing bottle check device.

Structure



Stainless steel, polyethylene, polypropylene, PVC, Hastelloyd, according to the chemical features of the product to fill. Acid proof varnish.

Optional

Bottle size changeover, cap size changeover, caps automatic feeder for rotary selector, bottles accumulation table, fine adjustment of liquid in the doser, automatic perfume addition after filling, by rotary Dosajet.

Power

400/230/24 + compressed air.

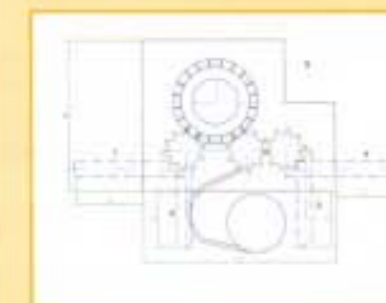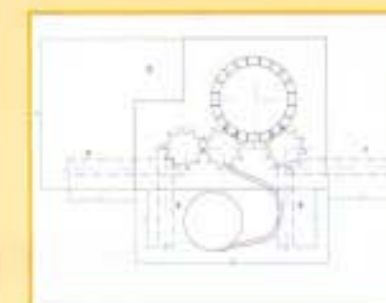

MODEL	Filling Heads	Capping Heads	Filling	Dosing range	Capacity l/hour	Overall dimensions			
						A	B	C	H
IC 12/2 2lt	12	6	gravity	500/2000	4000	1700	1350	1800	2450
IC 16/2 2lt	16	8	gravity	500/2000	5500	2000	1600	1800	2450
IC 20/2 2lt	20	10	gravity	500/2000	7000	2300	1750	2800	2450
IC 24/2 2lt	24	8	gravity	500/2000	8500	2000	2000	2800	2450
IC 30/2 2lt	30	10	gravity	500/2000	11000	2300	2300	2800	2450
IC 8/5 5lt	8	4	gravity	1000/5000	5000	2000	1600	1800	2550
IC 12/5 5lt	12	6	gravity	1000/5000	7500	2300	1750	2800	2550
IC 16/5 5lt	16	8	gravity	1000/5000	11000	2700	2350	2800	2550